

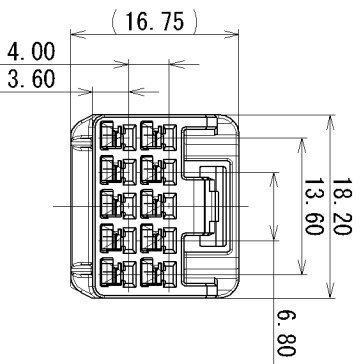


GENERAL TOLERANCE									
10 MAX	50 MAX	100 MAX	250 MAX	250 OVR	R5 MAX	R10 MAX	R20 MAX	R20 OVR	
A ±0.15	±0.2	±0.3	±0.5	±0.75					ANGLE
B ±0.2	±0.3	±0.55	±0.95	±1.4	±0.2	±0.3	±0.5	±2.5	±3°
C ±0.3	±0.5	±0.8	±1.4	±2					±3°
									ECCENT
									0.1
									0.1
									0.15

PART NO. AND CH. CODE	MATERIAL	COLOR
7187-8848, [A]	PBT	NATURAL
7187-8848-60, [A]	PBT	GREEN



注記
1. 適用端子品番 : 7116-7389-02 ETC.

NOTE
1. APPLICABLE TERMINAL PART NO. : 7116-7389-02 ETC.

CUSTOMER		CUSTOMER PART NO.		CUSTOMER DWG NO.	
2012/08/29	ADDED COLOR NO. ETC.	C12-2788	E.O		
2012/01/11	CHANGED FORM. [A]	C12-2055	J.C		
2011/11/24	NEW	C11-2621	T.M		
LET	DATE	REVISION RECORD	NO.	CHKD	
GENERAL TOLERANCE					
10MAX	50MAX	100MAX	250MAX	250OVR	ANGLE
A ±0.15	±0.2	±0.3	±0.5	±0.75	±30°
B ±0.2	±0.3	±0.55	±0.95	±1.4	±30°
C ±0.3	±0.5	±0.8	±1.4	±2	±30°
SPECIFIED					MASS
DWG TYPE		DWG SOURCE	DWG DATE	UNIT	SCL
R		NEW	2011/11/24	mm	2:1
APPROVED		CHECKED	CHECKED	DESIGN	DRAWN
H. KANDA		Y. IWAHORI		K. MATSUMURA	E. ORLANI
2012/08/29		2012/08/29		2011/08/31	2012/08/29
YAZAKI CORPORATION					

ISSUE MARK

MATL. SPEC. 2/ SEE TABLE

TREAT. & FIN.

NAME 060 10P HLC HOUSING FEMALE

PART NO. 7187-8848 ETC.

DWG NO. 7187-8848:R

SET DWG NO.