


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

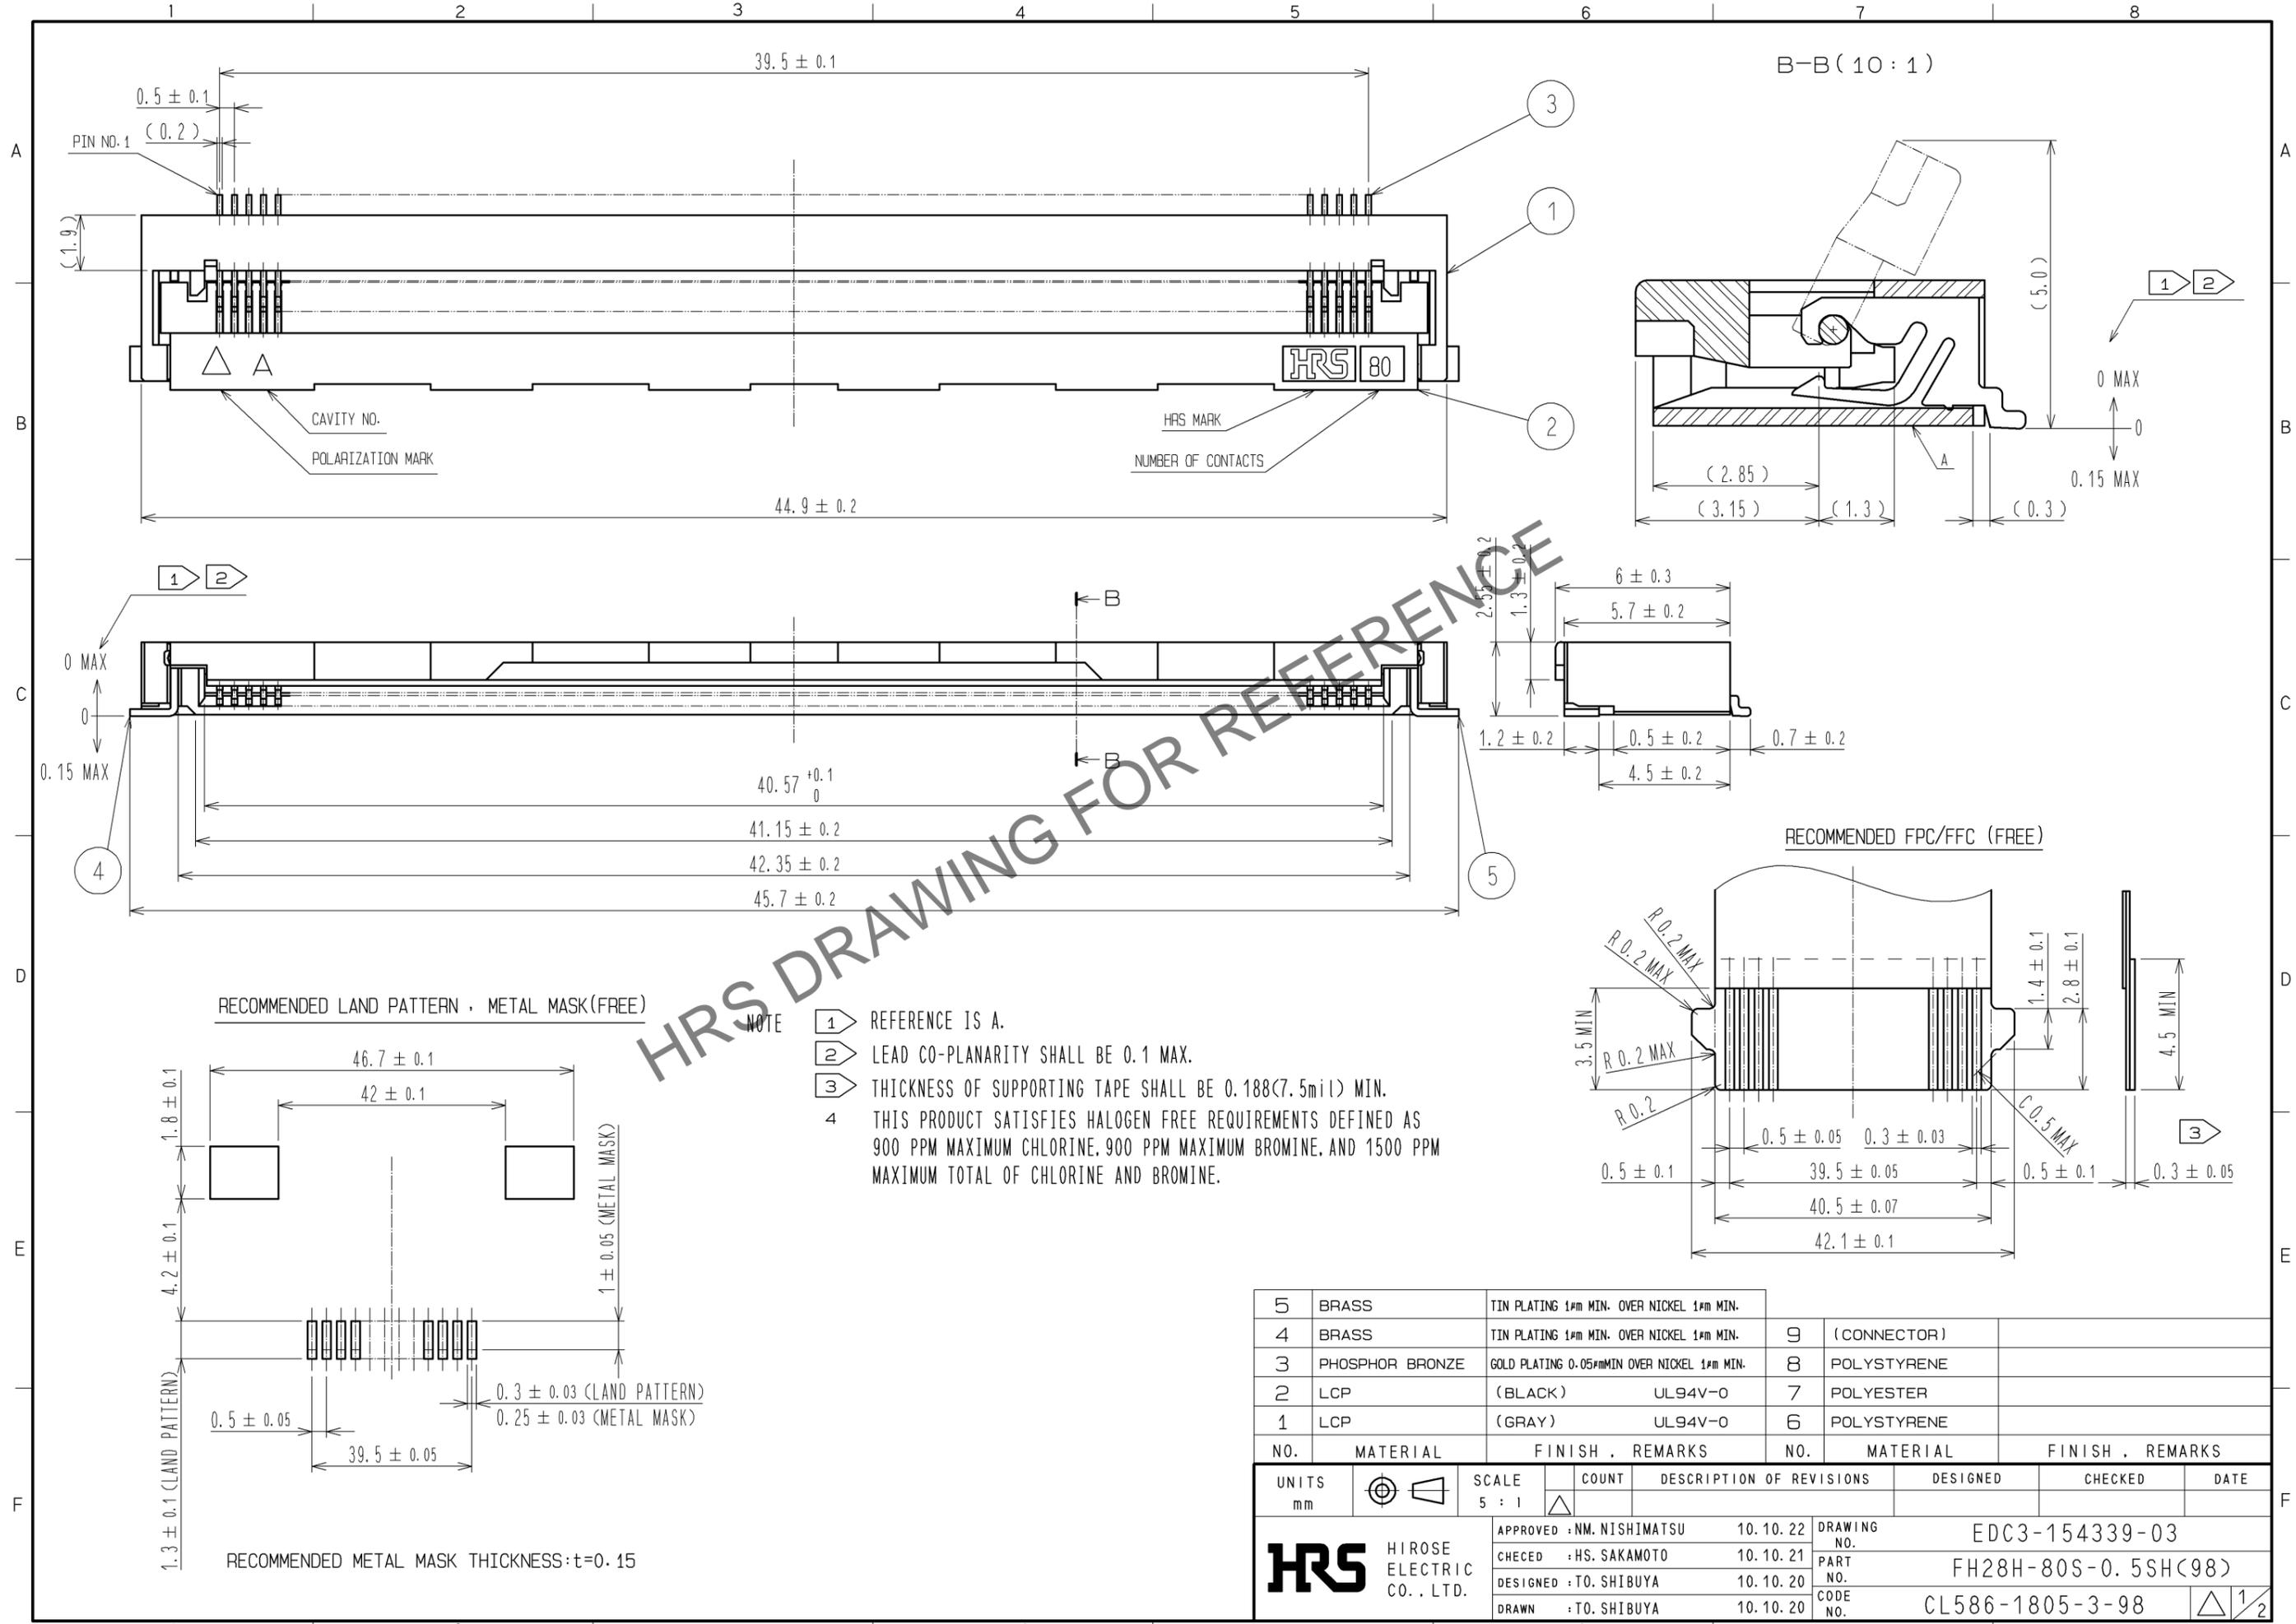


HRS DRAWING FOR REFERENCE

- NOTE
- 1 REFERENCE IS A.
 - 2 LEAD CO-PLANARITY SHALL BE 0.1 MAX.
 - 3 THICKNESS OF SUPPORTING TAPE SHALL BE 0.188(7.5mil) MIN.
 - 4 THIS PRODUCT SATISFIES HALOGEN FREE REQUIREMENTS DEFINED AS 900 PPM MAXIMUM CHLORINE, 900 PPM MAXIMUM BROMINE, AND 1500 PPM MAXIMUM TOTAL OF CHLORINE AND BROMINE.

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
5	BRASS	TIN PLATING 1μm MIN. OVER NICKEL 1μm MIN.					
4	BRASS	TIN PLATING 1μm MIN. OVER NICKEL 1μm MIN.		9	(CONNECTOR)		
3	PHOSPHOR BRONZE	GOLD PLATING 0.05μm MIN OVER NICKEL 1μm MIN.		8	POLYSTYRENE		
2	LCP	(BLACK) UL94V-0		7	POLYESTER		
1	LCP	(GRAY) UL94V-0		6	POLYSTYRENE		

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	△				
APPROVED : NM. NISHIMATSU			10.10.22	DRAWING NO. EDC3-154339-03		
CHECKED : HS. SAKAMOTO			10.10.21	PART NO. FH28H-80S-0.5SH(98)		
DESIGNED : TO. SHIBUYA			10.10.20	CODE NO. CL586-1805-3-98		
DRAWN : TO. SHIBUYA			10.10.20	△ 1/2		

Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

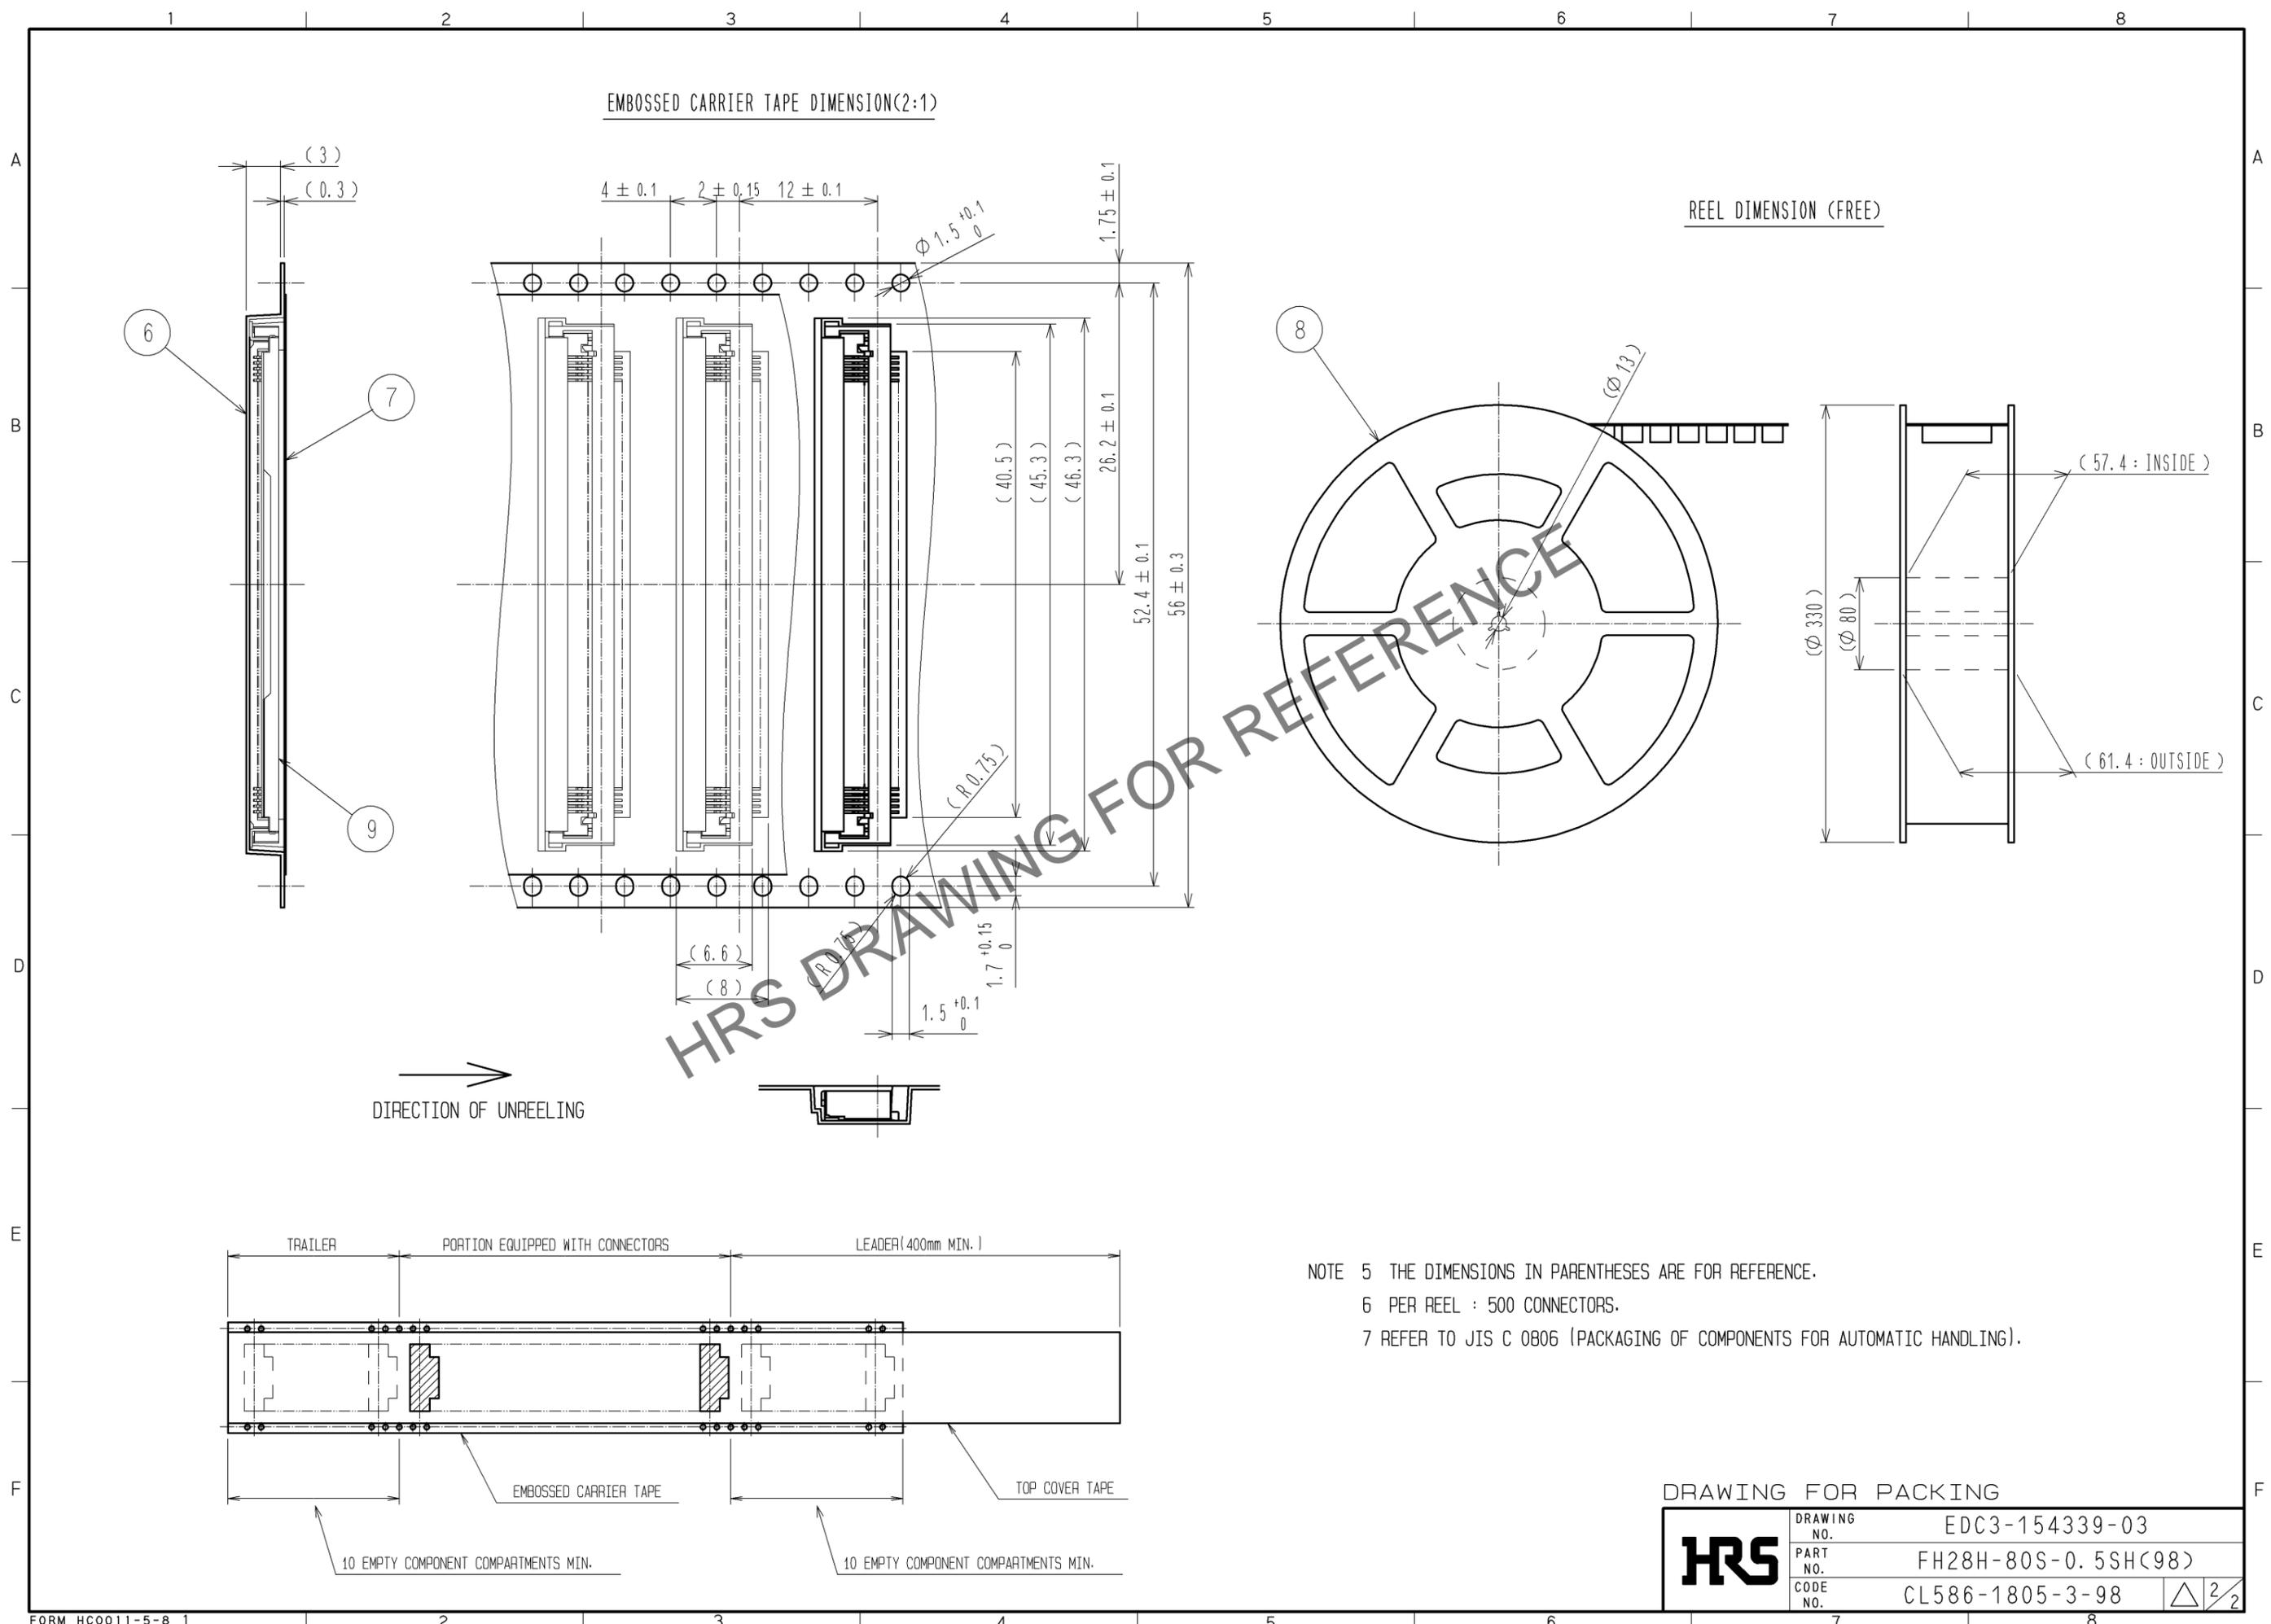

DRAWING FOR PACKING

HRS	DRAWING NO.	EDC3-154339-03
	PART NO.	FH28H-80S-0.5SH(98)
	CODE NO.	CL586-1805-3-98
		△ 2/2