


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

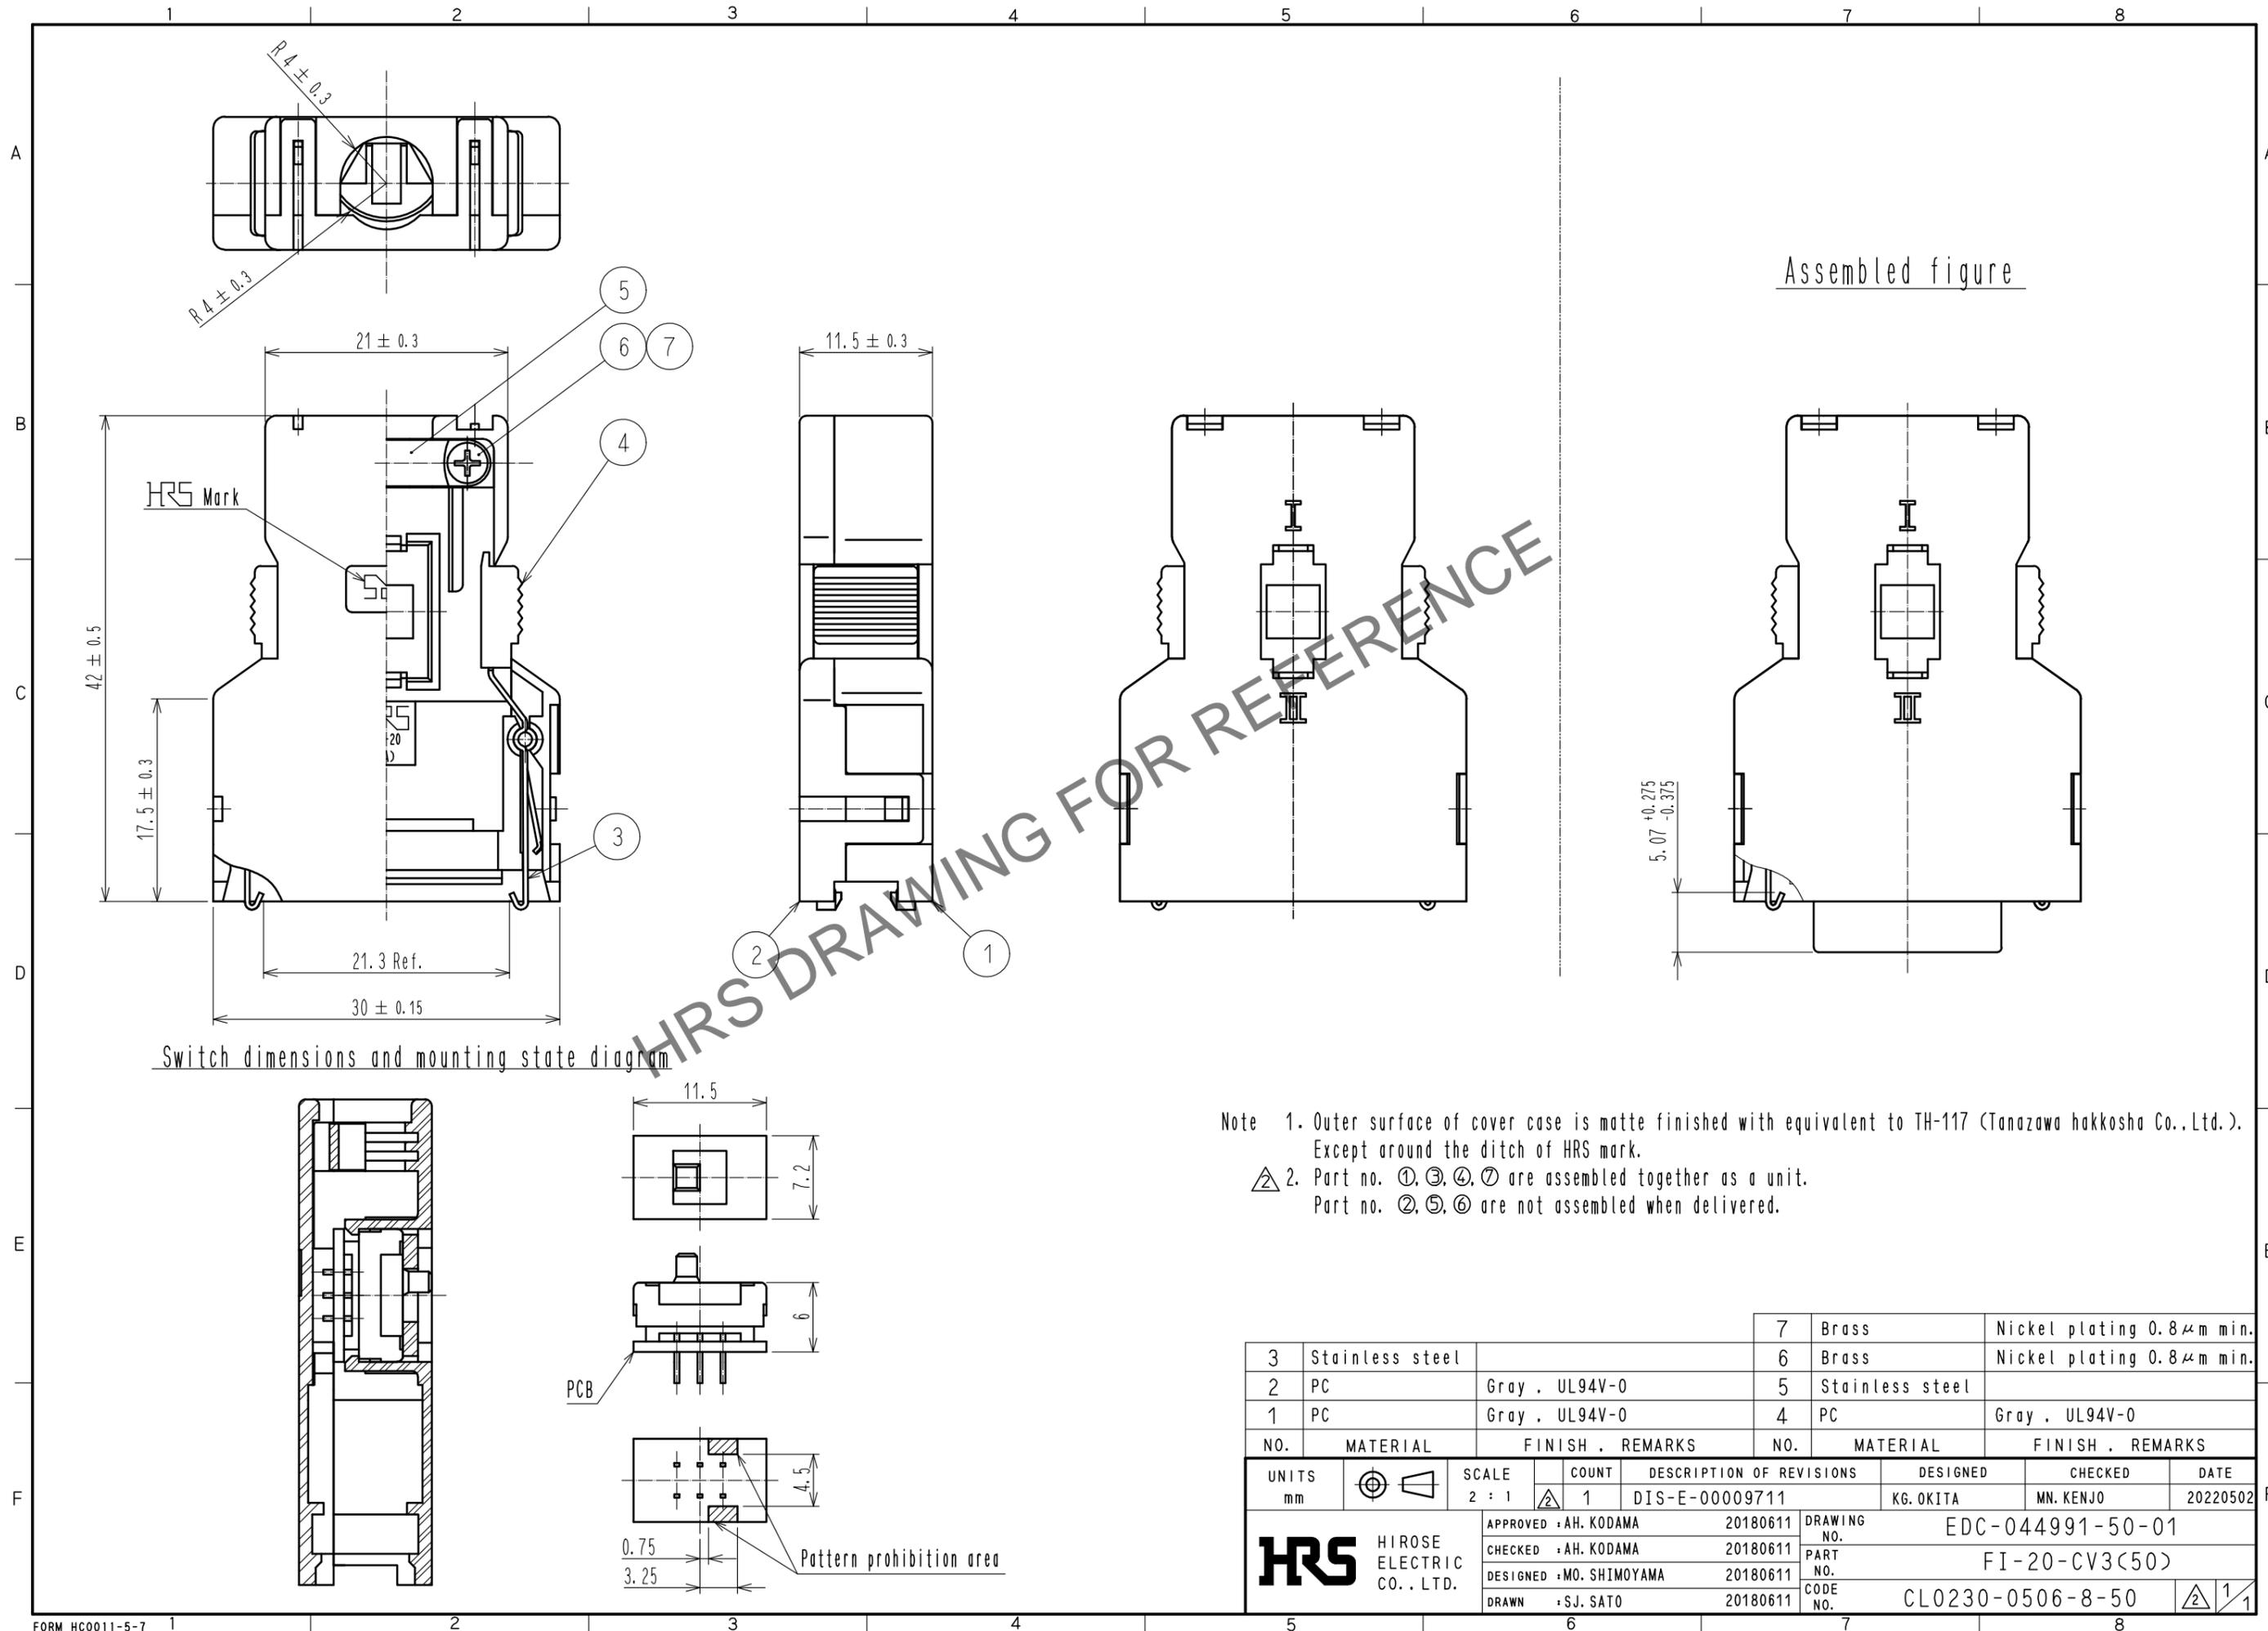

Switch dimensions and mounting state diagram

Assembled figure

Note 1. Outer surface of cover case is matte finished with equivalent to TH-117 (Tanazawa hakkosha Co., Ltd.).
 Except around the ditch of HRS mark.
 2. Part no. ①, ③, ④, ⑦ are assembled together as a unit.
 Part no. ②, ⑤, ⑥ are not assembled when delivered.

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
3	Stainless steel			7	Brass	Nickel plating 0.8 μ m min.	
2	PC	Gray . UL94V-0		6	Brass	Nickel plating 0.8 μ m min.	
1	PC	Gray . UL94V-0		5	Stainless steel		
				4	PC	Gray . UL94V-0	

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	1	DIS-E-00009711	KG. OKITA	MN. KENJO	20220502
APPROVED : AH. KODAMA			20180611	DRAWING NO. EDC-044991-50-01		
CHECKED : AH. KODAMA			20180611	PART NO. FI-20-CV3(50)		
DESIGNED : MO. SHIMOYAMA			20180611	CODE NO. CL0230-0506-8-50		
DRAWN : SJ. SATO			20180611	1/1		