

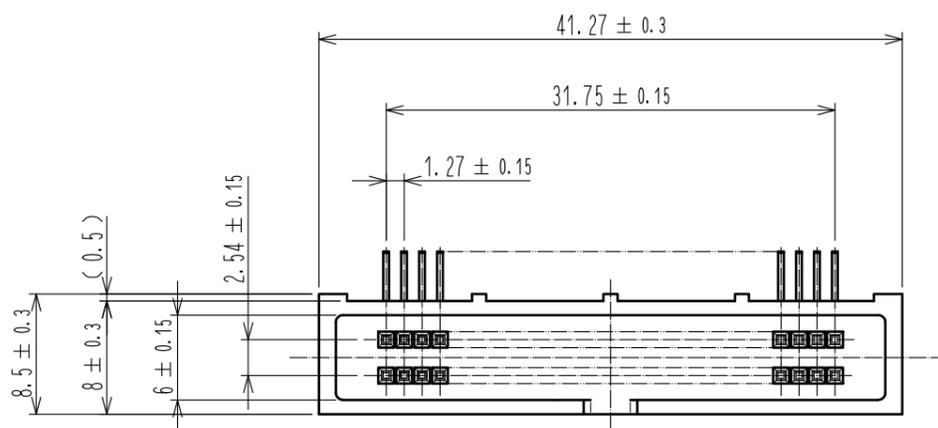
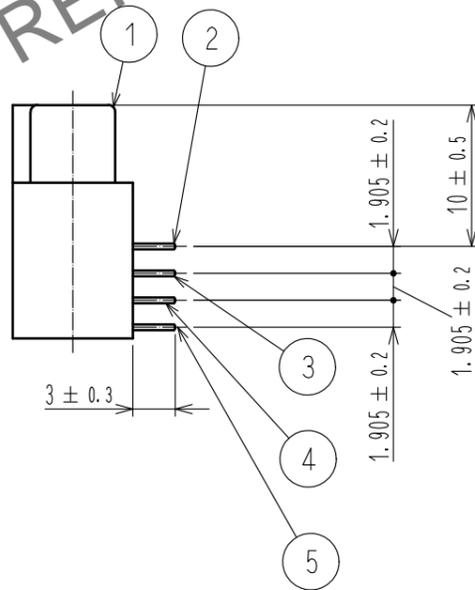



Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

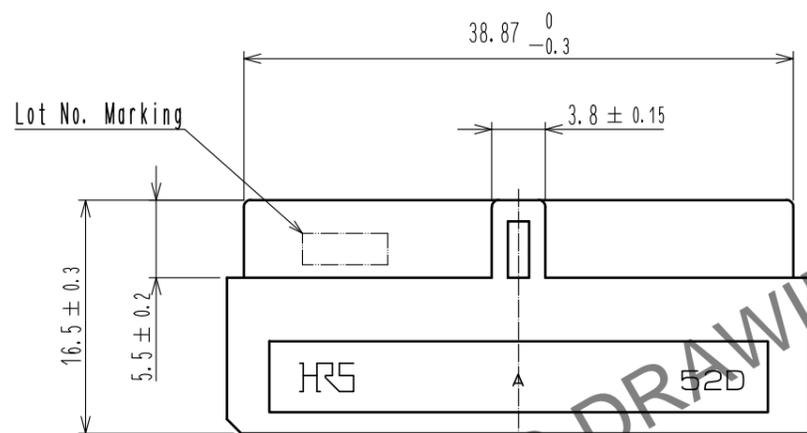

Recommended PC board hole pattern (mounting side)

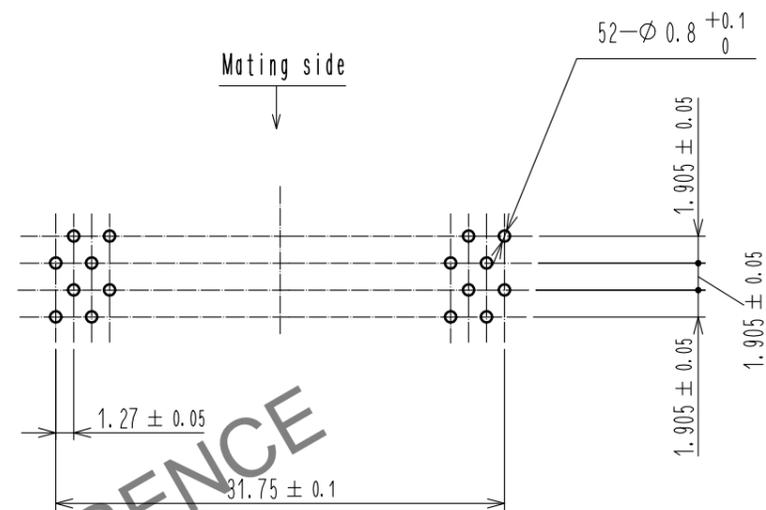

Notes 1 The dimensions in parentheses are for reference.

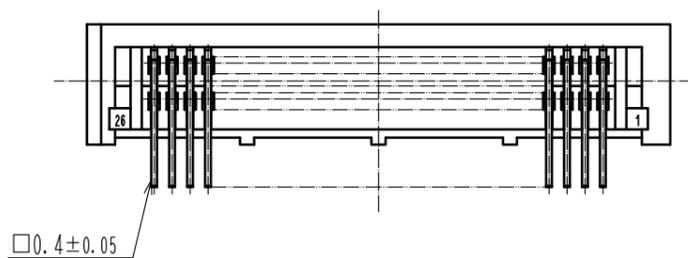

3	PHOSPHOR BRONZE	Contact area : Gold 0.2μm min Dip area : TIN-Plating 2μm min Under plating : Nickel 2.5μm min	5	PHOSPHOR BRONZE	Contact area : Gold 0.2μm min Dip area : TIN-Plating 2μm min Under plating : Nickel 2.5μm min
2	PHOSPHOR BRONZE	Contact area : Gold 0.2μm min Dip area : TIN-Plating 2μm min Under plating : Nickel 2.5μm min	4	PHOSPHOR BRONZE	Contact area : Gold 0.2μm min Dip area : TIN-Plating 2μm min Under plating : Nickel 2.5μm min
1	PBT	BLACK UL94V-0			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.				APPROVED : HT. YAMAGUCHI 18.06.25 CHECKED : HT. YAMAGUCHI 18.06.25 DESIGNED : TY. EDAGAWA 18.06.25 DRAWN : MK. OOKI 18.06.21	DRAWING NO. EDC-019019-71-21 PART NO. HIF6A-52DA-1.27DS(71) CODE NO. CL631-0007-7-71		