

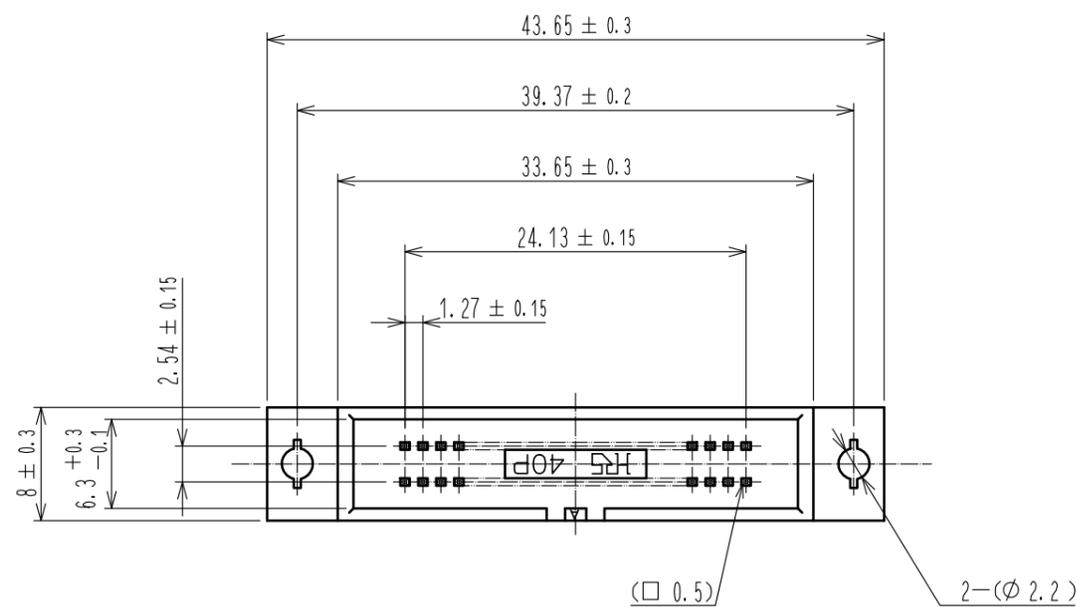
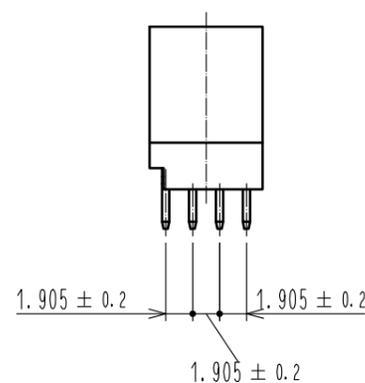



Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

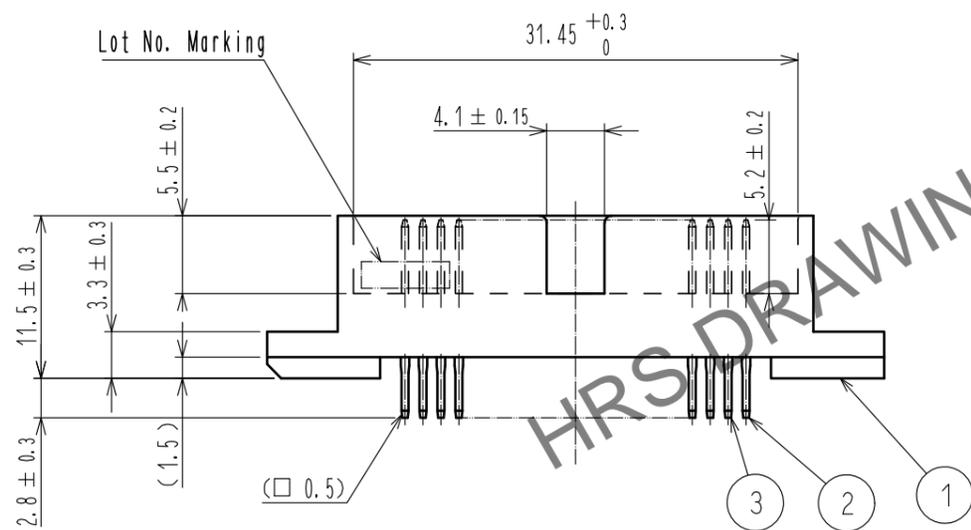

△ Recommended PC board hole pattern (mounting side)

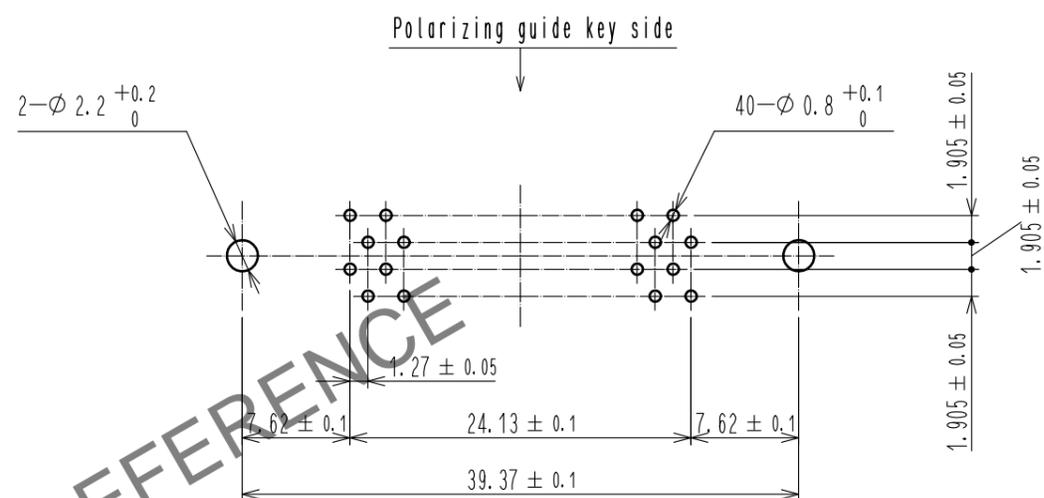

Notes 1 The dimensions in parentheses are for reference.

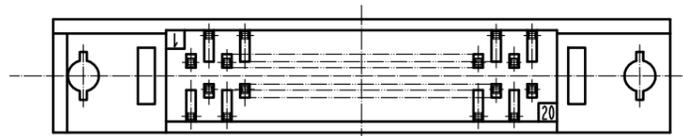

2	BRASS	Contact area : Gold 0.2 μ m min. Dip area : TIN-Plating 2 μ m min. Under plating : Nickel 2.5 μ m min.	3	BRASS	Contact area : Gold 0.2 μ m min. Dip area : TIN-Plating 2 μ m min. Under plating : Nickel 2.5 μ m min.			
1	PBT	BLACK UL94V-0						
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
mm		2 : 1	1	DIS-F-00003693		TM. NAKAJIMA	HT. YAMAGUCHI	18.09.11
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HT. YAMAGUCHI	18.06.25	DRAWING NO.		EDC-019077-71-21		
		CHECKED : HT. YAMAGUCHI	18.06.25	PART NO.		HIF6B-40PA-1.27DSA(71)		
		DESIGNED : TY. EDAGAWA	18.06.25	CODE NO.		CL631-0355-3-71		
		DRAWN : MK. OOKI	18.06.21			1/1		