


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

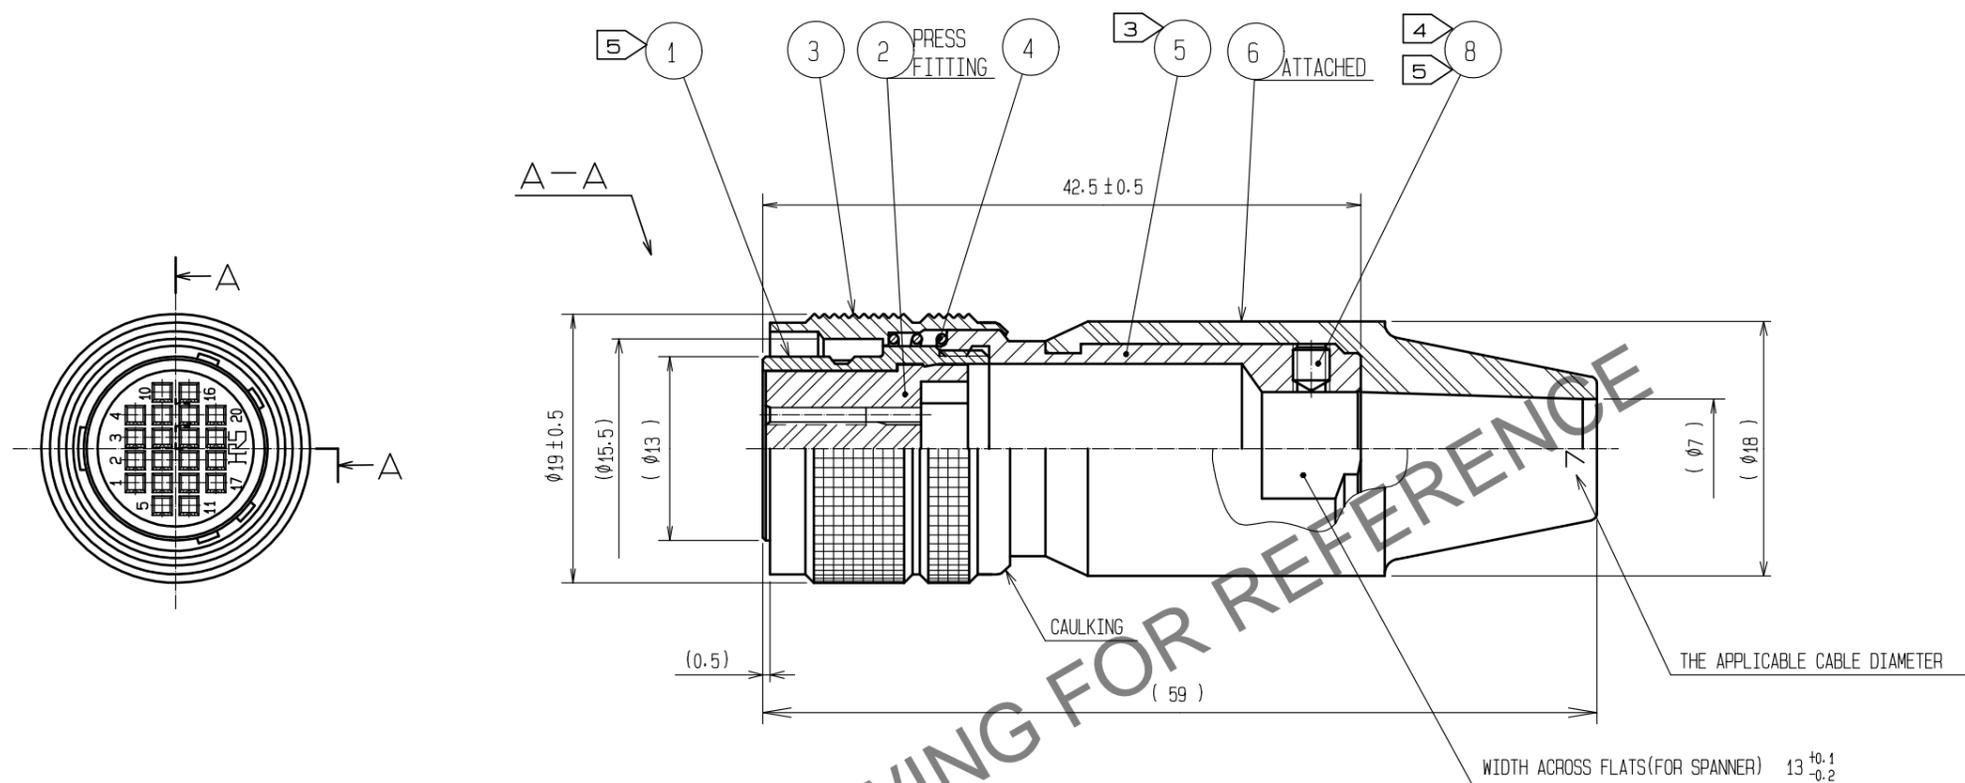

HRS DRAWING FOR REFERENCE

- NOTES 1 APPLICABLE CRIMP CONTACT:HR12-SC-212(CL112-0408-9)
 APPLICABLE WIRE:AWG#26 TO #30(COVERED WIRE MAX. OUTSIDE DIA.ø1)
 APPLICABLE CONTACT REMOVAL TOOL(EXTRACTION TOOL):HR12-SC-TP(CL150-0050-3)
- 2 APPLICABLE CRIMPING TOOL OF REF.NO. ⑦:HR10A-TC-02(CL150-0041-2)
 THE HOLE DIAMETER FOR CRIMPING:ø7.0
- 3 THE RECOMMENDED CLAMP TORQUE, REF.NO. ⑤: 2 TO 2.5 N·m.
- 4 ACROSS FLATS HEXAGON HEAD OF REF.NO. ⑧: 1.27
 THE RECOMMENDED CLAMP TORQUE, REF.NO. ⑧: 0.3 TO 0.4N·m.
 THE TIP OF REF.NO. ⑧ SHALL BE FIXED TO THE CONCAVE PORTION WITH REF.NO. ⑦ CLAMPED TO THE CABLE.
- ① ⑤ LOCTITE 263, HENKEL JAPAN OR EQUIVALENT APPLIES TO PREVENT REF.NO. ① AND ⑧ FOR LOOSENING.
- 6 ONE EXAMPLE OF THE ROTATION OF REF.NO. ⑤ TO REF.NO. ① IS SHOWN.
- 7 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER, DEPENDING ON THE CABLE STRUCTURE.
 PLEASE CONFIRM BEFORE THE USE.
- ⑧ THE ASSEMBLY THIS PRODUCT APPLIES TO THE MANUAL ETAD-C0354-00.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
4	STEEL	NICKEL PLATING	8	STEEL	NICKEL PLATING M2.6X0.45X3
3	BRASS	MATTE FINISH NICKEL PLATED	7	BRASS	
2	POLYBUTYLENE TEREPHTHALATE	(BLACK) UL94V-0	6	CHLOROPRENE RUBBER	(BLACK)
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	5	BRASS	NICKEL PLATING

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	2	DIS-C-00017346	HT. ZENBA	HY. KOBAYASHI	20240508

APPROVED	CHECKED	DESIGNED	DRAWN	DRAWING NO.	PART NO.	CODE NO.
MO. SATOH	MO. SATOH	TO. HORII	MK. SATO	20070323	20070323	20070320
				EDC3-023955-73	HR10A-13P-20SC(73)	CL0110-0702-3-73