




Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

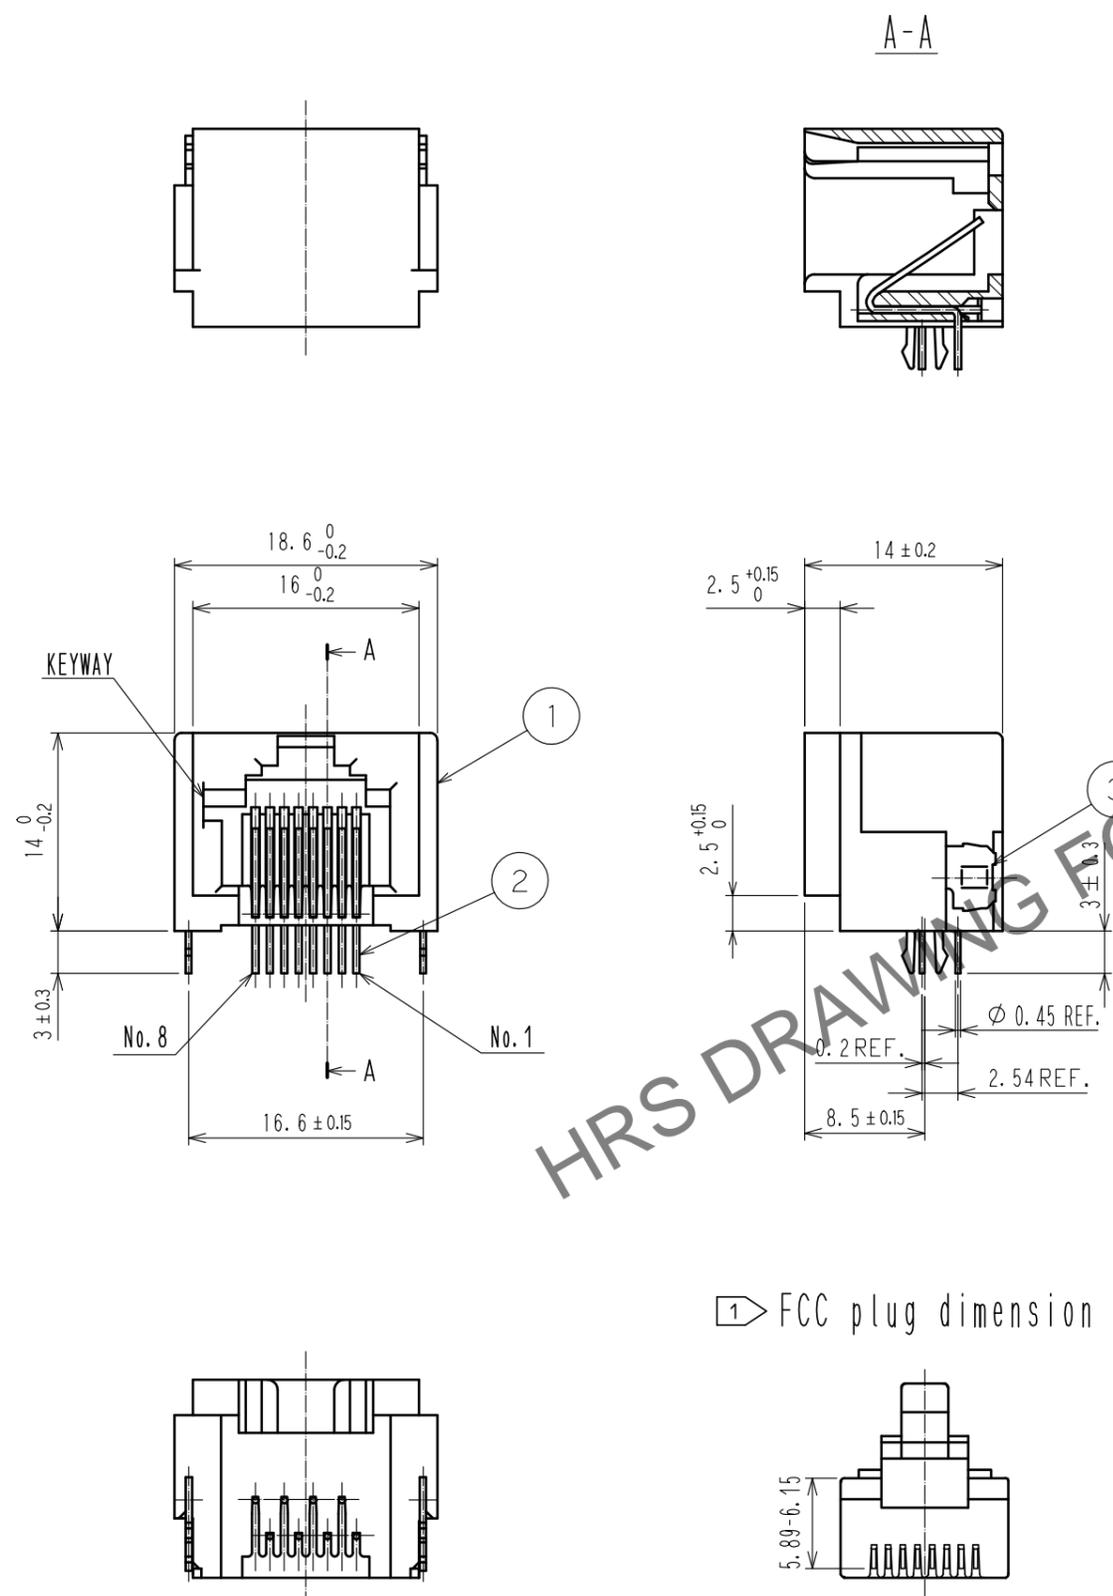

RECOMMENDED PC BOARD HOLE PATTERN (MOUNTING SIDE)
(APPLICABLE THICKNESS OF PC BOARD t=1.6)

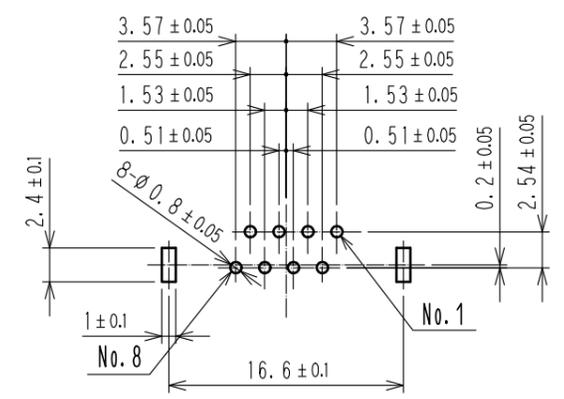

HRS DRAWING FOR REFERENCE

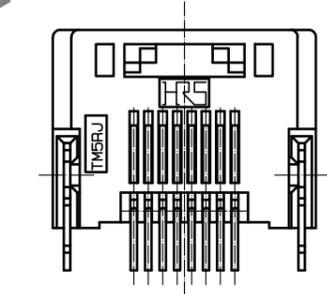

Note ① Do not mate with the plug nonconforming to FCC standard.
Take extra care to the contact location shown in the figure.

① FCC plug dimension

1	PBT	GRAY • UL94V-0	3	PHOSPHOR BRONZE	TIN REFLOW PLATING 1 μm MIN.		
2			2	PHOSPHOR BRONZE	CONTACT AREA : GOLD PLATING 1.27 μm MIN. LEAD AREA : GOLD PLATING 0.03 μm MIN. UNDER PLATING : NICKEL PLATING 1.27 μm MIN.		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS	⊙	SCALE	△	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm		2 : 1					
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : MN. KENJO	20211126	DRAWING NO. EDC-026382-60-00			
		CHECKED : KG. OKITA	20211125	PART NO. TM5RJ3-88(60)			
		DESIGNED : MO. SHIMOYAMA	20211125	CODE NO. CL0222-1465-3-60			
		DRAWN : MO. SHIMOYAMA	20211125			①/1	